



Environmental Potentials

Power Quality For The Digital Age



PRODUCT CATALOG

COMPREHENSIVE

www.ep2000.com • 1.844.500.7436

Copyright © EP2022

2022

The EP Upgrade for the Electrical Distribution System



The electrical industry has made a significant leap in the last 25 years. Technological advancements have put us on an efficiency path unlike anything seen in the industrialized era. This business revolution is driven by business process automation and is a direct result of these advancements.

Equipment is electrical, electronic, or a hybrid of the two. Equipment is programmable; equipment is sophisticated; equipment is expensive and requires a higher level of maintenance and service.

This difference in equipment means the return on investment is constantly at risk. Operations and maintenance strategies are dynamic planning efforts to drive the critical deliverables of such equipment. Often, the company deploying an automation strategy is going to endure loss of production, increase maintenance costs and have sporadic and abbreviated equipment lifecycles.

Environmental Potentials has built an entire company around the greatest glaring threat that automation promises to deliver. Whether the goal is to optimize production output, squeeze lean operations for efficiency gains, or grow the revenue per employee ratio, one reality remains. The quality of the power delivered to the equipment will significantly affect these goals.

EP provides the first major upgrade to the electrical distribution system in more than 50 years.



Table of Contents

2-9	General Product & Technology Info
10	EP-2800CA/2800 Modular Protection
11	EP-2800CA
13	EP-2800
15	Commercial Protection
16	EP-2500
17	EP-2000
18	EP-LPF Lighting Protection Filter
19	EP-2000 DIN
20	EP-2700
21	EP-2750 & EP-2775
22	Power Supplies
23	EP-RPS Rack Mount
24	EP-HPS Home Theatre
25	EP-MPS Medical
26	Residential/Light Commercial
27	EP-2050 Residential Filter
28	EP-2050EE highend Residential Filter
29	EP-HPF Home Protection Filter
30	EP-DigiPlug Portable
31	EP-DigiPlug Stationary
32	EP-OEM
33	EP-Mini (Lighting)
34	Sample Installation

**Comprehensive product listings for Distributors,
Spec Development, and Manufacturing Reference.**



What is Power Quality?

While there are many complex definitions of power quality, a simple one is: the measure of voltage and current waveforms flowing to your electrical equipment. Good power quality is stable voltage and current with undistorted waveforms. Unfortunately, good power quality is rare. Electrical systems are constantly being assaulted by waveform distortions and changing voltages. There are some external threats to power quality such as lightning and transformer failure. However, almost 85 percent of power quality problems are generated inside of your own facility. Poor power quality translates into equipment deterioration, computer crashes, stoppage in assembly lines, equipment malfunction, flickering lights and wasted energy. Since businesses are powered almost entirely by electrical equipment poor power quality significantly reduces productivity.

Waveform Correction Technology

Environmental Potentials' patented waveform correction technology has revolutionized power quality for the past 12 years. Previously, power quality devices focused on protecting equipment from extreme events. Extreme events were defined as more than 20% above or below the peaks of the sine wave. These extreme events are created by events such as lightning, utility switching, transformer failure, and large faults.

However, the proliferation of electronics, computers and digital equipment is creating pollution on the waveform which rarely, if ever, exceeds the 20% "envelope". The processes of rectifying AC to DC, and inverting DC to AC, are responsible for generating 85% of power pollution.

These signal manipulations leave the waveform full of pollution. This pollution equals losses, unreliable performance, decreased asset lifespans, malfunctions, increased maintenance, and downtime.

Environmental Potentials' patented waveform correction technology focuses on tracking the waveform and filtering all of the pollution generated by continuous power conversion. Environmental Potentials converts this pollution into heat within the unit rather than relying on ground, other system conductors, or even loads to provide the required attenuation. This eliminates harmful and unusable energy from your system.

Installing EP ensures the waveform delivered to your expensive equipment is as sinusoidal as possible.



Installing the EP System

Environmental Potentials' waveform correction technology was designed as a system wide solution for 21st century power quality problems. All computerized, digital and electronic equipment is responsible for degrading power quality. This means power quality is being constantly assaulted from inside the facility.

The EP system was designed to combat this constant assault. For the EP system to achieve its goals the best method is to distribute the system throughout the entire facility. However, financial can hinder efforts to completely install the EP system. Please consider the following factors when selecting the right system with your rep.

The chart on page 5 will help in selecting which product is right for your application. Notice there is some overlap of products. The factors below will help you determine which product is best for your facility. If you have any questions please contact your official EP sales rep.

Factors to Consider

1. Type of facility: Commercial facilities typically include convenience stores, office buildings and retail outlets. Industrial facilities include steel mills, manufacturing facilities, oil refineries or any facility with motors larger than 75 HP. The third category is medical facility. If the installation is for a commercial facility, select the smaller size. Medical facilities have extremely sensitive and expensive equipment while industrial facilities have harsh environments.

2. Electrical Configuration: Does the transformer configuration match the panel configuration (wye transformer, neutral in panel)? If no, then contact an authorized EP rep for assistance.

3. Application: EP's waveform correctors have several different applications. The most common are **increasing equipment performance, protecting equipment, reducing electrical losses or solving power quality problems with the electrical system.**

4. Equipment: Does the facility have multiple variable frequency drives? All nonlinear equipment generates significant non sinusoidal waveforms and extreme levels of high frequency noise between the range of 3kHz-1MHz. Do not apply an EP-2000 on a VFD 50 HP or larger.

Basic Field Guide to Select EP Waveform Correctors

Step 1: Collect application information:

- Rated Panel or rated machine amperage
- System voltage and number of phases
- System configuration Wye or Delta, (neutral or no neutral)

Step 2: Based on the panel or machine amperage, select the required EP Series from chart below

- For EP2000 page 18; EP2500 page 16; EP2800 series page 12; go to page 11 for EP2800CA series; features explained on page 9.

Step 3: Select Part #:

- **Example 1:** EP unit is to be applied to a 225A Lighting panel, 3 phase, 120/208Voltage, Wye configuration. The part # is EP20003Y208 The “3Y” indicates three phase wye (neutral) configuration while the “208” indicates a 120/208V system.
- **Example 2:** EP unit is to be applied to a 1200A panel, 3 phase 480 delta, in an industrial facility. The chart shows this will be a EP-2822. The part # is EP28223D480
The 3D indicates three phase delta (no neutral) configuration while the 480 indicates a 480V system.

RECOMMENDED	RATED PANEL/MACHINE AMPERAGE						
	0-15	15-60	60-300	300-800	800-1600	1600-2000	2000-4000+
Product							
EP2000 DINRAIL	✓	✓					
EP2000		✓	✓				
EP2500, EP-LPF				✓			
EP2822					✓		
EP2844						✓	✓
EP2888							✓

This is a general guide for initial implementation of Environmental Potentials product in the modern facility. Other factors in a facility can contribute to deviating from this general guideline. When selecting a product for a VFD application, do not apply EP-2000's to any VFD 50 HP or larger

Independent Testing

Approximately 85% of power pollution is generated inside facilities in the form of A1 & B3 ring waves. Environmental Potentials' developed a product capable of dealing with this 21st century problem. Independent testing lab, Electrical Systems Analysis performed several performance tests on EP and two legacy competitors. The goal of the test was to see if waveform correction technology could suppress internal surges better than legacy solutions.

2000V 70 Amp Spike

6000V 500 Amp Spike

Figure 1: An A1 ring wave at 180 degrees. The green line represents EP. The blue line and the yellow line represents legacy SPD technology. The higher the line goes the more danger there is to equipment.


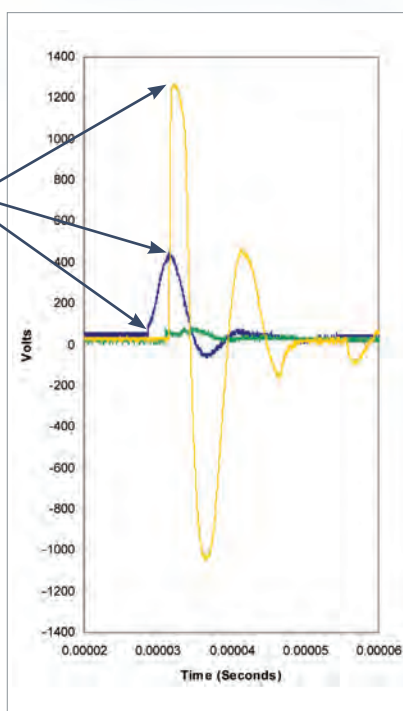


Figure 2: A B3 ring wave at 180 degrees. Notice the yellow and blue lines go above 1200V on both the positive and negative half cycle. This dangerous energy goes directly to expensive electrical equipment.

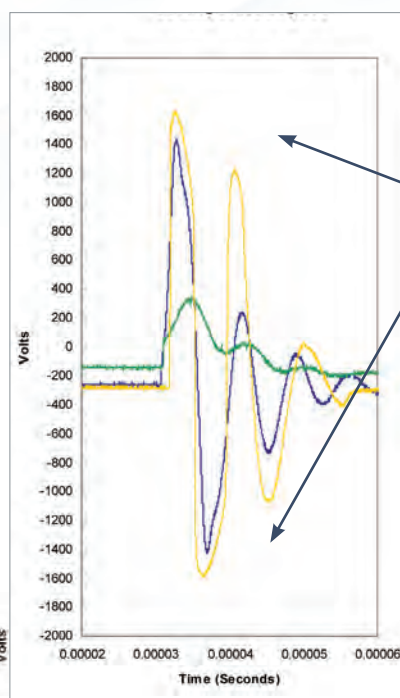

Let through voltage is the amount voltage let through the device and into the electrical system. Both of the EP competitors let through enough voltage to cause equipment malfunctions, waste energy and shorten the asset lifecycle.

Environmental Potentials' patented waveform correction technology is the only technology available that protects facilities from the 15% of external threats such as lightning and the 85% of internal threats such as noise. Every other company focuses on protecting from only the 15% of catastrophic surge events and not the 85% of the surges that disrupt the production process.

*to see the full testing reports please visit www.ep2000.com and click on the library link. Or email info@ep2000.com and write "Send me the ESA Report" in the subject line.


Frequency Noise: 3kHz – 1MHz

High frequency noise between 3kHz-1MHz is extremely harmful to the electrical system. Noise in this range is responsible for several power quality problems including:


- Printed Circuit Board Burned Out
- Board Component Failures
- Random Memory Wipe
- Corrupted Binary Data Packets
- Overheated Conductors
- Hysteresis Losses In Motors/
Transformers
- UPS Stuck In Bypass
- Ballast Failure And Noise Contribution
- Ground Loops
- PLC/PAC Lockup
- VFD Nuisance Trip
- Skin Effect
- Voltage Flicker
- Power Supply Failure
- Server Room Overheating

The graphs below show high frequency noise between 3kHz-1MHz generated by a VFD. The graph on the left is before installing EP waveform correctors, while the graph on the right is after installing EP waveform correctors.

Current & Voltage High Frequency Noise before EP

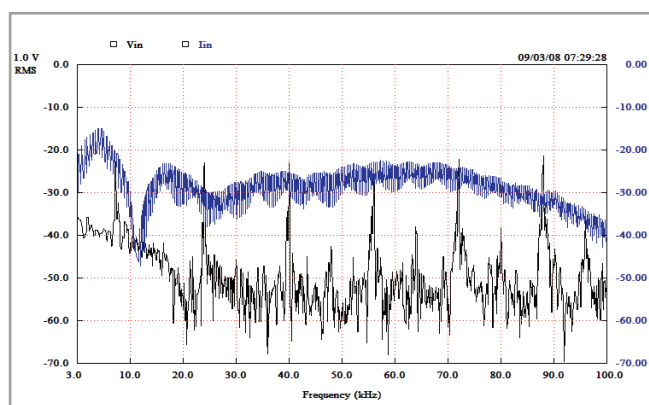


Current & Voltage High Frequency Noise after EP

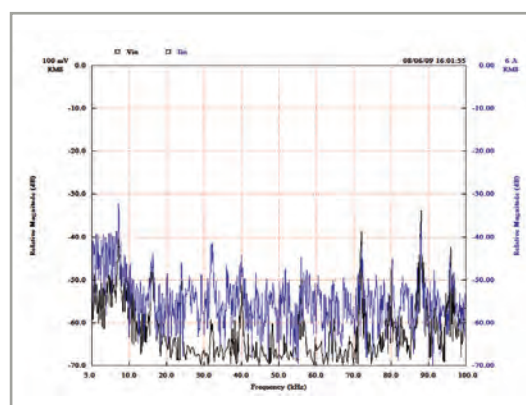

Features & Benefits of Waveform Correction Technology

Environmental Potentials' patented waveform correction technology focuses on tracking the waveform and filtering all of the pollution generated by continuous power conversion. Environmental Potentials converts this pollution into heat within the unit rather than relying on ground, other system conductors, or even loads to provide the required attenuation. This eliminates harmful and unusable energy from your system.

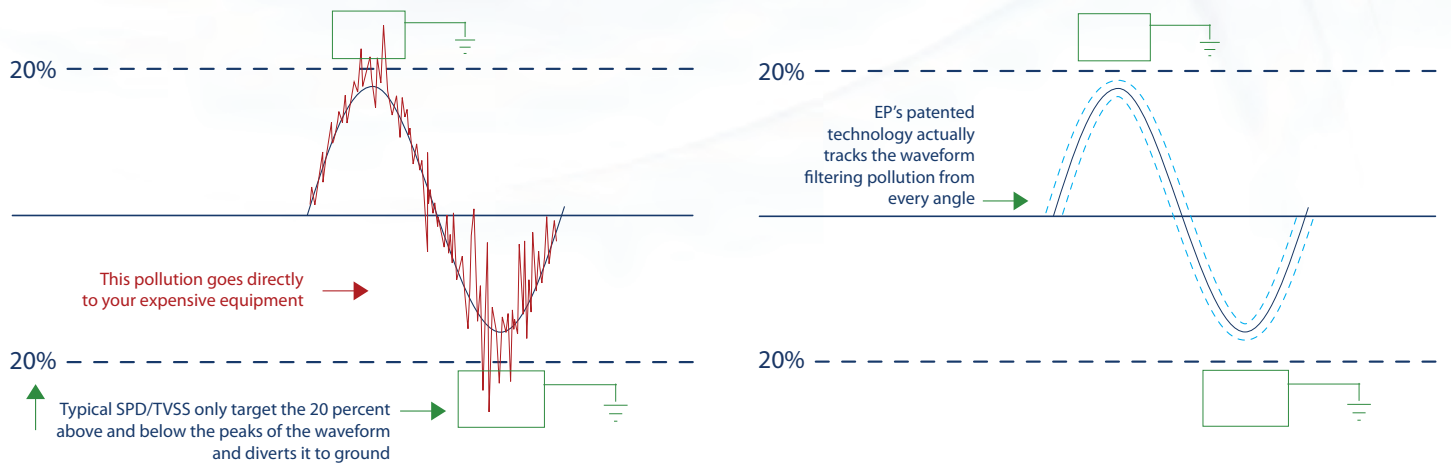

Features:

Remove the high frequency noise generated by switching transient and/or Correct the sinusoidal nature of the waveform

Absorb – the switching noise and voltage transients

Spread - distribute the energy

Dissipate – dissipate energy in the form of heat within the unit

DOES NOT divert the noise to ground


Since most of the power quality pollution is generated in the facility, it is not recommended to divert electrical noise (high frequency noise) back into the electrical system

Switched-Mode Power Supplies

Technological advancements have revolutionized the workplace. Every employee has a PC. Automated phone systems are a must. Fax machines and copiers are a given. Thanks in part to switched-mode power supplies (SMPS), electronics are smaller, lighter, faster and more efficient than ever before. An SMPS is an electronic power supply unit installed directly into digital equipment. It can convert AC to DC, can change voltage, change frequencies and is highly efficient.

However, SMPS's are also responsible for generating high frequency noise. Noise is the cause of many disturbances within the electrical distribution system, such as computer freezes, network crashes, ballast burnouts, equipment malfunctions and energy losses. All of which equals a significant reduction of return on investment.

Environmental Potentials' patented waveform correction technology filters and eliminate harmful frequency noise from 3kHz-1MHz.

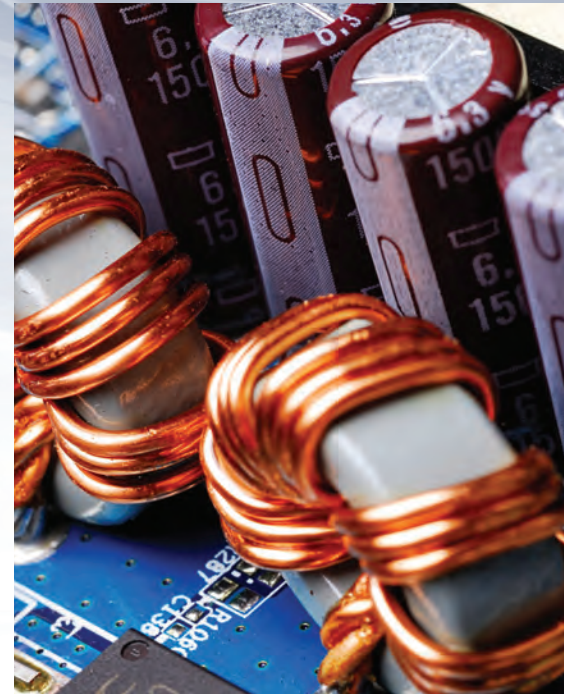

Ground is Not the Answer for Frequency Noise

Because of the natural inductance, capacitance and resistance in all cables, any point more than three feet from the single grounding point has its own electrical characteristic. This problem is exacerbated by an increase in frequency. The sensitive electronic devices prevalent in all facilities produce a tremendous amount of frequency noise in the 3kHz-1MHz range. This noise will ride on the normal power at 60 Hz and is connected to every piece of equipment through all the phases, neutral and your safety grounds.

A building can appear to have a perfectly grounded facility at 60 Hz, yet at 3000 Hz become noisy and harmful to your equipment. This is clearly explained in the IEEE 1100 Emerald Book. It warns engineers that the concept of ground reference is only applicable to 60 Hz. The higher frequencies become trapped inside the facility and are not eliminated at the local ground connections.

THE 2800 SERIES: MODULAR PROTECTION

The EP-2800 series of filter/protectors come in three different sizes with: 2, 4 and 8 optional modules. The 2800 is the only filter/protector in the industry that protects factories against catastrophic surges while also absorbing and dissipating harmful energy generated by electronic devices such as ballasts, computers and industrial control circuits like VFD's.

Modular design provides a cost effective method for meeting current protection needs while also allowing for future growth. This filter/protector is designed for easy installation, typically less than one hour and the modular design means adding new modules can be done in the field in minutes. The 2800 family can be fully customized with dual surge counters, remote relay status alarm, audible alarm, both system and module status LED's and 600VAC, 200kA I.R integrated fuseable disconnects allowing direct bus connection with no upstream disconnect required.

The 2800 has a CA option which is fully customizable and allows the user to select the product that best fits the application.

	EP-2800	EP-2800CA
30Amp 200kAIC Fusing	Yes	Yes
LED Visual Notification	Yes	Yes
Audible Alarm	No	Yes
Dry Contacts/Remote Alarm	No	Yes
Dual Surge Counters	No	Yes

Fusing

The 2800 series come equipped with 600VAC, 200 kA I.R. fuses. The fuses have surge ratings of 20kA-100kA 8X20µSec capacity. The fuses are located inside the enclosure. These fuses are specially designed to withstand 8X20µSec surge pulses without opening. Removing the fuses renders the unit inoperable.

LED Visual Notification

The 2800 series have green LED lighting on the cover of the unit for visual notification of the unit's status. If the LED lights are on the unit is functioning properly. If any of the lights are extinguished, a module needs to be replaced. Inside the casing, red LED lights will indicate which module needs replacing.

Audible Alarm

The 2800CA series are equipped with an audible alarm that will trigger if a unit becomes disabled. There is an ON/OFF switch to disable the alarm. Both the alarm and the switch are located on the outside/front of the unit directly above the surge counters.

Dry Contacts/Remote Relay

Perhaps your electrical room is tucked away in the back of the factory and has little or no foot traffic. The 2800CA series offer dry contacts that can connect to your preferred device to provide notification to wherever you would like.

Surge Counters

Want to know how many surge events you are protected from each month? Well, the 2800CA series come equipped with dual surge counters. The counters are on the front of the unit. Both counters are equipped with a gray reset button on the lower right hand corner of the surge counter. The reset button for the bottom counter has been disabled.

EP-2800CA SERIES WAVEFORM CORRECTOR



THE EP-2800CA FEATURES AND BENEFITS:

- Provides 80kA to 640kA per mode single-pulse surge current
- Integrated Dissipation Technology. Energy is absorbed and dissipated within the unit, not shunted to the ground.
- Active Sine Wave tracking filter
- No additive harmonic distortion
- Patented technology of the 2800B module provides industry superior filter performance
- Reacts to transient in nanoseconds
- Status LED Indicators
- Top and Bottom feed
- 10 -Year Warranty

EP-2800CA GENERAL SPECIFICATIONS

MAX SURGE CURRENT RATING: 640kA per mode
REPETITIVE SURGE CURRENT RATING: 5000 impulses using IEEE C62.41
PRODUCT DESIGN: Patented waveform correction technology and fused TMOV in a convenient parallel design
OPERATING FREQUENCY: 45 - 65 Hz
WARRANTY: 10 Years
LISTING: UL 1449 4th Edition Type 1 & Type 2 SPD
CSA std. c22.2 No. 8-2013 Ed 5
SAFETY: Fire Rating 94V-0
COMPLIANCE: NEMA LS-1, NEC Surge Suppression Standards, UL 96 A

EP-2800CA ELECTRICAL SPECIFICATIONS

CONNECTION METHOD: Parallel
PROTECTION MODES: L-N, L-L
CONTRACTOR SUPPLIED WIRE: 00 AWG Wire
INTEGRATED FUSEABLE DISCONNECT: 600VAC, 200kA I.R.
STATUS INDICATORS: Local and Remote LED
EMI/RFI FILTER ATTENUATION: MIL Standard 220B

The **EP-2820CA** can hold up to two modules.
Two base modules provide 160kA protection.

The **EP-2840CA** can hold up to four modules.
Four base modules provide 320kA protection.

The **EP-2880CA** can hold up to eight modules.
Eight base modules provide 640kA protection.


EP-2800CA B MODULE

- 80kA single impulse surge current
- Integrated filter with sine wave tracking
- Integrated dissipation technology


EP-2800CA F MODULE

- Patented technology provides industry-superior filter performance
- Protected by mandatory base module for consistent filtering
- Integrated dissipation technology


2820CA

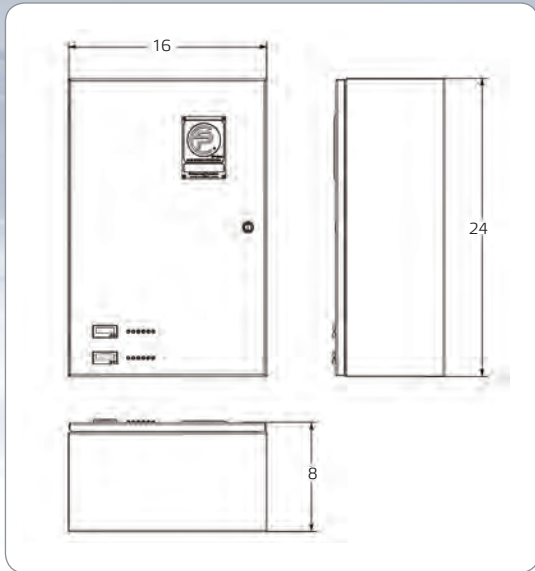

2840CA

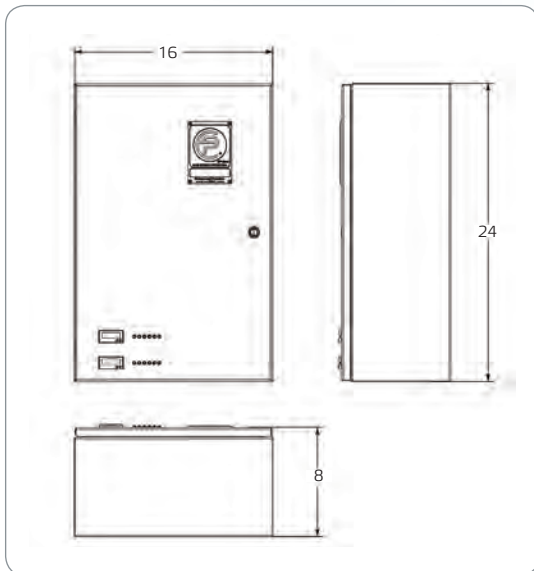

2880CA

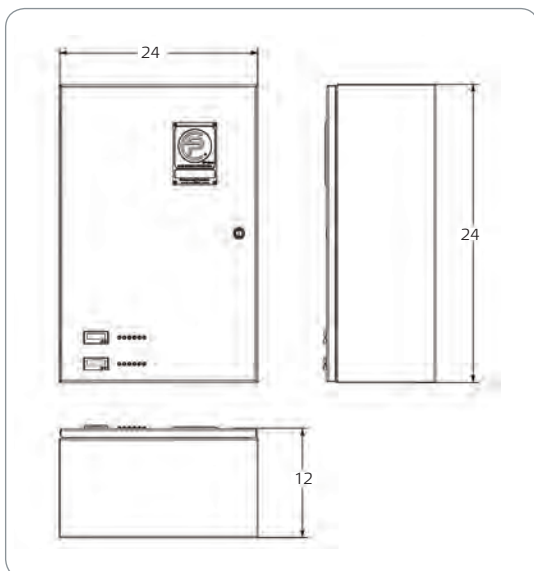

EP-2800CA SERIES PRODUCT ORDERING GUIDELINES


CASE SIZE REFERENCE

EP-2820: 24x16x8

EP-2840: 24x16x8

EP-2880: 24x24x12

MODEL NUMBER

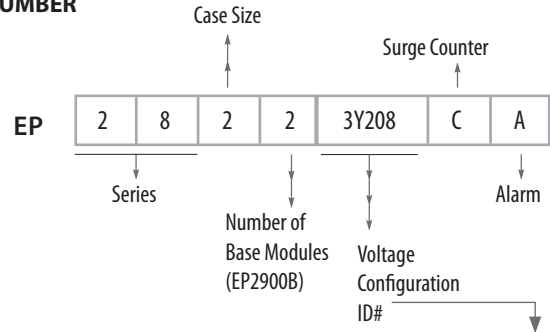

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Phase 120/240	L-N L-L	700 1000	3 Wire + G	1S240
3 Phase 120/208	L-N L-L	700 1000	4 Wire + G	3Y208
3 Phase 277/480	L-N L-L	1200 1800	4 Wire + G	3Y480
3 Phase 347/600	L-N L-L	1200 2500	4 Wire + G	3Y600
3 Phase 480V	L-L	1800	3 Wire + G	3D480
3 Phase 600V	L-L	2500	3 Wire + G	3D600

MECHANICAL SPECIFICATIONS

DIMENSIONS	24 x 16 x 8 inch 61 x 40.6 x 20.3 cm
WEIGHT	60 lbs. / 27.27 Kg
ENCLOSURE	NEMA 4, 12, 13
OPERATING TEMPERATURE	-40F to 140F -40C to +60C
NON-CONDENSING HUMIDITY	5% to 95%

*Other voltages and configurations available upon request

EP-2800 SERIES WAVEFORM CORRECTOR



THE EP-2800 FEATURES AND BENEFITS:

- Provides 80kA to 640kA per mode single-pulse surge current
- Integrated Dissipation Technology. Energy is absorbed and dissipated within the unit, not shunted to the ground
- Active Sine Wave tracking filter
- No additive harmonic distortion
- Patented technology of the 2800B module provides industry-superior filter performance
- Reacts to transient in nanoseconds
- Status LED Indicators
- Top and Bottom feed
- 10 -Year Warranty

EP-2800 GENERAL SPECIFICATIONS

MAX SURGE CURRENT RATING: 640kA per mode
REPETITIVE SURGE CURRENT RATING: 5000 impulses using IEEE C62.41
PRODUCT DESIGN: Patented waveform correction technology and fused TMOV in a convenient parallel design
OPERATING FREQUENCY: 45 - 65 Hz
WARRANTY: 10 Years
LISTING: UL 1449 4th Edition Type 1 & Type 2 SPD
CSA std. c22.2 No. 8-2013 Ed 5
SAFETY: Fire Rating 94V-0
COMPLIANCE: NEMA LS-1, NEC Surge Suppression Standards, UL 96 A

EP-2800 ELECTRICAL SPECIFICATIONS

CONNECTION METHOD: Parallel
PROTECTION MODES: L-N, L-L
CONTRACTOR SUPPLIED WIRE: 00 AWG Wire
INTEGRATED FUSEABLE DISCONNECT: 600VAC, 200kA I.R.
STATUS INDICATORS: Local and Remote LED
EMI/RFI FILTER ATTENUATION: MIL Standard 220B

The **EP-2820** can hold up to two modules.
Two base modules provide 160kA protection.

The **EP-2840** can hold up to four modules.
Four base modules provide 320kA protection.

The **EP-2880** can hold up to eight modules.
Eight base modules provide 640kA protection.

EP-2800B MODULE

- 80kA single impulse surge current
- Integrated filter with sine wave tracking
- Integrated dissipation technology


EP-2800F MODULE

- Patented technology provides industry-superior filter performance
- Protected by mandatory base module for consistent filtering
- Integrated dissipation technology

2820



2840

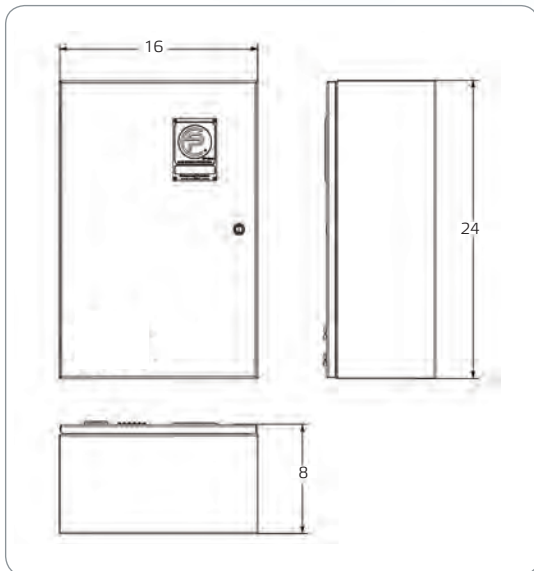

2880



EP-2800 SERIES PRODUCT ORDERING GUIDELINES


CASE SIZE REFERENCE

EP-2820: 14x12x8

EP-2840: 24x16x8

EP-2880: 24x24x12

MODEL NUMBER

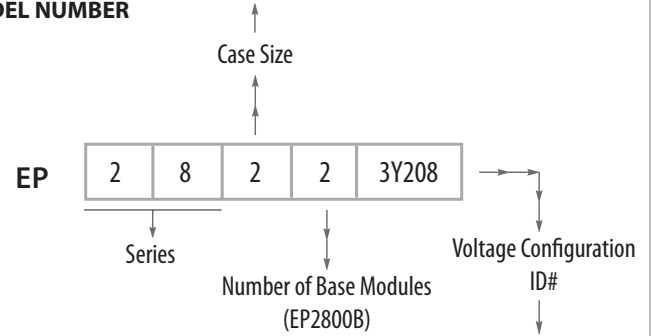

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Phase 120/240	L-N L-L	700 1000	3 Wire + G	1S240
3 Phase 120/208	L-N L-L	700 1000	4 Wire + G	3Y208
3 Phase 277/480	L-N L-L	1200 1800	4 Wire + G	3Y480
3 Phase 347/600	L-N L-L	1200 2500	4 Wire + G	3Y600
3 Phase 480V	L-L	1800	3 Wire + G	3D480
3 Phase 600V	L-L	2500	3 Wire + G	3D600

MECHANICAL SPECIFICATIONS

DIMENSIONS	12 x 14 x 8 inch 30.5 x 35.6 x 20.3 cm
STANDARD WEIGHT	24 lbs. / 10.89 Kg
MAXIMUM WEIGHT	30 lbs. / 13.61 Kg
ENCLOSURE	NEMA 4, 12, 13
OPERATING TEMPERATURE	-40F to 140F -40C to +60C
NON-CONDENSING HUMIDITY	5% to 95%

*Other voltages and configurations available upon request



COMMERCIAL PROTECTION


Since approximately 85 percent of power quality problems are generated by electrical equipment inside the facility, protection only at the main gate will not improve power quality. To truly ensure equipment is performing to its maximum capability it is necessary to cover every electrical panel and all large equipment.

Designed for industrial and commercial applications the EP-2500 is perfect for downstream panels in heavy industrial environments and strong enough for the main panel in most commercial facilities. The EP-2000 is perfect for point of equipment applications in heavy industrial environments and in downstream panels in commercial facilities.

More than 10 years after the release of the EP-2000, these waveform correctors continue to lead the industry in improving equipment performance. EP patented waveform correctors provide 24/7 active filtration and protection. Conveniently sized and shaped the EP-2000 and EP-2500 fit into most panels and are designed to handle a diverse range of electrical environments.



EP-2500 WAVEFORM CORRECTOR: MEDIUM PROTECTION

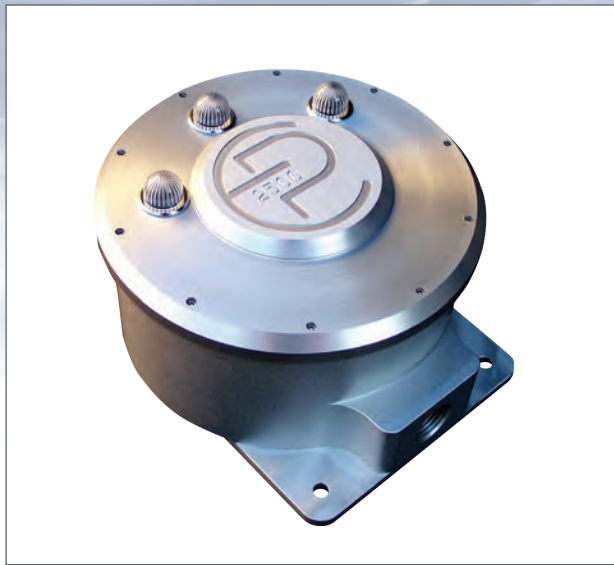

The **EP-2500** is the industry's most advanced power quality solution available. The patented circuit of the **EP-2500** uses innovative technology to minimize the erratic behavior of sensitive electronic devices, protect the connected equipment, from lighting to motors

THE EP-2500:

ABSORBS, DISSIPATES & REMOVES
with increased capacity

- Transient voltage surges and spikes
- Frequency Noise Between 3kHz-1MHz
- Ring waves

DOES NOT SHUNT ENERGY TO GROUND.

The facility ground is not relied on for performance or survivability.

EP-2500 GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

80 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

UL 1449 4th Edition Type 2 SPD

CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous

Key Event Time: Approx. 1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 10 AWG Length: 3'

MATERIALS

Aluminum Housing, LED Indicator Lamps, 10 AWG 600V rated Wire.

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Amber LED indicates active phase


DIMENSIONS & WEIGHT

Diameter: 6.375" Depth: 3.85" Weight: 6 lbs.

Compact for easy installation.

EP-2500 PRODUCT ORDERING GUIDELINES

MODEL NUMBER

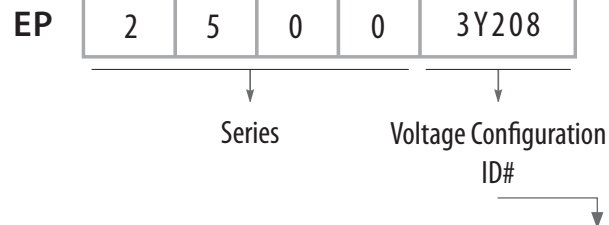

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM	VOLTAGE ID#
Single Phase 120/240	L-N L-L	700 1000	3 Wire + G	1S240
Single Leg 120V	L-N	700	2 Wire + G	1L120
Single Leg 240V	L-N	1000	2 Wire + G	1L240
3 Phase 120/208	L-N L-L	700 1000	4 Wire + G	3Y208
3 Phase 277/480	L-N L-L	1200 1800	4 Wire + G	3Y480
3 Phase 480V	L-L	1800	3 Wire + G	3D480

EP-2000 WAVEFORM CORRECTOR: P.O.E. PROTECTION



The **EP-2000** is the industry's most advanced power quality solution available. The patented circuit of the **EP-2000** uses innovative technology to increase the efficiency of an electrical distribution system, protecting the connected equipment that drives your process, from home automation to industrial robotics - and everything in between.

THE EP-2000:

ABSORBS, DISSIPATES & REMOVES

- Transient voltage surges and spikes
- Frequency Noise Between 3kHz-1MHz
- Ring waves

DOES NOT SHUNT ENERGY TO GROUND.

The facility ground is not relied on for performance or survivability.

EP-2000 GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

UL 1449 4th Edition Type 2 SPD

CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous Key Event Time:

Approx. 1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 14 AWG Length: 3'

MATERIALS

Aluminum Housing, LED Indicator Lamps, 14 AWG 600 V rated Wire.

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Amber LED indicates active phase


DIMENSIONS & WEIGHT

Diameter: 4.34" Depth: 3.35" Weight: 3 lbs.

Compact for easy installation.

EP-2000 PRODUCT ORDERING GUIDELINES

MODEL NUMBER

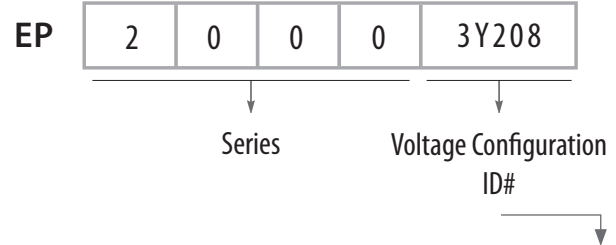

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Phase 120/240	L-N	400	3 Wire + G	1S240
	L-L	800		
Single Leg 120V	L-N	400	2 Wire + G	1L120
	L-L	800		
Single Leg 240V	L-N	800	2 Wire + G	1L240
	L-L	800		
3 Phase 120/208	L-N	400	4 Wire + G	3Y208
	L-L	800		
3 Phase 277/480	L-N	1000	4 Wire + G	3Y480
	L-L	1800		
3 Phase 480V	L-L	1800	3 Wire + G	3D480

EP-LPF LIGHTING PROTECTION FILTER: LIGHTING APPLICATIONS



The EP-LPF is the industry's most advanced power quality solution available for lighting panels. The patented circuit of the EP-LPF uses innovative technology to protect the expensive lighting solutions from transients and noise, therefore increase the efficiency of the electrical distribution system. EP-LPF designed to remove switching noise generated by all kinds of lighting drivers/ballasts.

- Specifically designed for your lighting panels
- Designed by lighting gurus in the industry

THE EP-LPF: ABSORBS, DISSIPATES, & REMOVES

- Transient voltage surges and spikes
- The frequency noise generated by LED, Induction, Mercury, HID and fluorescent drivers
- The noise generated by other loads such as VFDs and inverters

EP-LPF GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 1.5 kHz

MAX SURGE CURRENT

80 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

The circuit is build to meet:

UL 1449 4th Edition Type 2 SPD

CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous Key Event Time:

Approx. 1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 14 AWG Length: 3'

MATERIALS

Aluminum Housing, LED Indicator Lamps, 14 AWG 600 V rated Wire. Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Amber LED indicates active phase

DIMENSIONS & WEIGHT

Square: 6" Depth: 4" Weight: 4 lbs.

Rectangular: 7.5"x6" Depth: 3.35" Weight: 5 lbs. (with the backplate)

Compact for easy installation.

EP-LPF PRODUCT ORDERING GUIDELINES				
MODEL NUMBER				
<div style="display: flex; justify-content: center; align-items: center; gap: 10px;"> EP <div style="border: 1px solid black; padding: 2px 5px;">L</div> <div style="border: 1px solid black; padding: 2px 5px;">P</div> <div style="border: 1px solid black; padding: 2px 5px;">F</div> <div style="border: 1px solid black; padding: 2px 5px;">3Y208</div> </div> <div style="display: flex; justify-content: center; margin-top: 10px;"> <div style="text-align: center; margin-right: 100px;">↓ Series</div> <div style="text-align: center;">↓ Voltage Configuration ID#</div> </div>				
VOLTAGE CONFIGURATIONS				
SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Phase 120/240	L-N L-L	405 780	3 Wire + G	1S240
Single Leg 120V	L-N	405	2 Wire + G	1L120
Single Leg 240V	L-N	780	2 Wire + G	1L240
3 Phase 120/208	L-N L-L	405 780	4 Wire + G	3Y208
3 Phase 277/480	L-N L-L	910 1350	4 Wire + G	3Y480
3 Phase 480V	L-L	1350	3 Wire + G	3D480

EP-2000 DIN WAVEFORM CORRECTOR: DIN RAIL APPLICATIONS



Finally the industry's most powerful filter is available in a convenient din rail enclosure. The **EP-2000** DIN offers waveform correction technology for all din rail applications. This provides filtration, waveform correction for other din rail technologies such as motor controls, conveyor control applications and PLC's. The DIN unit is available in 120V & 240V AC and 12V & 24V DC.

THE EP-2000 DIN:

ABSORBS, DISSIPATES & REMOVES

- Transient voltage surges and spikes
- Frequency Noise Between 3kHz-1MHz
- Ring waves

DOES NOT SHUNT ENERGY TO GROUND.

The facility ground is not relied on for performance or survivability.

EP-2000 DIN GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

UL 1449 4th Edition Type 2

CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous

Key Event Time: Approx. 1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Screw Terminals; Max Wire Size 12 AWG

MATERIALS

LED Indicator Lamp

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Green LED indicates active phase

DIMENSIONS & WEIGHT

Length: 86 mm Width: 35 mm

EP-2000 DIN PRODUCT ORDERING GUIDELINES

MODEL NUMBER

EP-2000



VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Leg 120V	L-N	400	2 Wire + G	1L120
Single Leg 240V	L-N	800	2 Wire + G	1L240

EP-2700 HIGH FREQUENCY FILTER



The **EP-2700** is a constantly-on high frequency noise filter. This filter complements the **EP-2000** by supplying additional filtration to environments where there is a high level of high frequency noise pollution.

THE EP-2700:

- Has a greater than -30 dB reduction from 5 kHz to 2 MHz
- Has a maximum attenuation of greater than -40 dB from 45 kHz to 250 kHz
- Absorbs and dissipates energy within the unit
Energy is not shunted to the ground. Case ground only
- This unit will not work on the output of a VFD;
it will attenuate the control frequency

EP-2700 GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-30 dB reduction from 5 kHz to 2 MHz

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

APPLICATION ENVIRONMENT

Subpanel Distribution, PLC Protection, Buss Plug, Machine Feed,
VFD Input Power (Must be used in combination with either EP-2000 or EP-2500)

COMPLIANCE

NEMA LS-1, Electrical Notice 516

CONNECTION

Wire leads Size: 14 AWG Length: 3'

DIMENSIONS & WEIGHT

Three-Phase: Length: 6.25" Width: 6.25" Height: 4" Weight: 8 lbs.
Mounting Plate: 8.25 x 6.25 x .25"

Single-Phase: Length: 4.75" Width: 4.75" Height: 3.75" Weight: 5 lbs.
Mounting Plate: 6.75 x 4.75 x .25"

MATERIALS

Aluminum Housing, 14 ga 600 V rated Wire.

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Red LED Indicator Lights = Failure Mode

The EP-2700 is an extremely sensitive filter and should only be applied at the recommendation of Environmental Potentials. Never install a 2700 in a facility that has grounded the neutral leg of a wye transformer downstream of the main service. This is a common practice in many facilities.

EP-2750 & 2775 GROUND FILTERS



The **EP-2750** and **EP-2775** remove high frequency resonance in the grounding system.

THE EP-2750 AND EP-2775:

- Remove high frequency resonance in the grounding system
- Allow for greater leverage of ground system to dissipate events
- Add filtering to prevent ground loops
- Reduce feedback to sensitive electronics and instrumentation from ground
- Reduce the chance of equipment damage caused by flashover and near-strike lightning

EP-2750 & EP-2775 GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

Noise attenuation starting at 15 kHz and attenuation of -30 dB at 1.5 MHz

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

APPLICATION ENVIRONMENT

Subpanel Distribution, PLC Protection, Buss Plug, Machine Feed

CONNECTION

Wire Leads Length: 2'

EP-2750 Size: 10 AWG Wire EP-2775 Size: 3 AWG Wire

2750 DIMENSIONS & WEIGHT

Length: 4" With mounting tabs: 4.75" Width: 2" Height: 1.5" Weight: 10 oz.
Compact size for easy installation.

2775 DIMENSIONS & WEIGHT

Length: 4.75" With mounting tabs: 6" Width: 4.75" Height: 3.75"
Weight: 5.5 lbs. Compact size for easy installation.

MATERIALS

Plastic Housing, 10 AWG Wire for 2750, 3 or 6 AWG wire for 2775.


Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

COMPLIANCE

NEMA LS-1, Electrical Notice 516

GROUND FILTER PRODUCT LIST

PRODUCT	WIRE OPTIONS	PRODUCT NUMBER
EP-2775	3 AWG	EP2775-3
EP-2775	6 AWG	EP2775-6
EP-2750	10 AWG	EP2750-10
EP-2750	12 AWG	EP2750-12

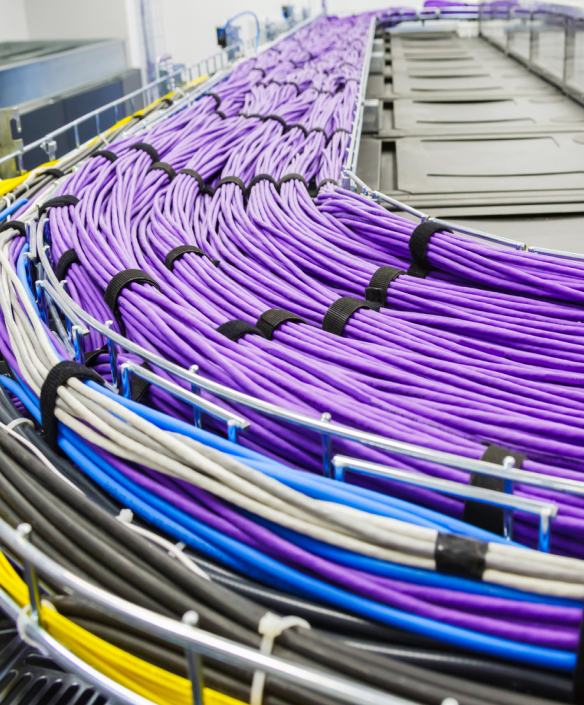

POWER SUPPLIES

Businesses rely on power for critical operations. Technological advancements made electronic equipment smarter, faster and more sophisticated than ever before. However, power disturbances and poor power quality can significantly reduce the return on investment for these expensive and critical assets.

Clean power will extend the lifecycle and increase the performance and efficiency of expensive electrical and electronic equipment. Environmental Potentials designed its line of power supply products to provide businesses, medical facilities, data centers and residences with EP's industry changing waveform correction technology in a convenient, portable plug-in case.

Environmental Potentials' power supplies integrate EP's patented waveform correction technology, additional noise filtration and protection from extreme events

EP-RPS RACK MOUNTED POWER SUPPLY



The **EP-RPS** is a unique rack mounted power supply, combining several EP product features to provide an all-in-one protection unit with **isolated power banks**. It is conveniently sized for use with standard rack mounted electrical loads such as PDU's and servers, and but can be used in various situations where a protected power supply is beneficial.

THE EP-RPS PROVIDES:

- EP-2000 Surge Protection
- EP-2700 High Frequency Filtering
- EP-2750 Ground Filtering
- 12 x RJ-45 with 10/700 uS, 6KV Surge protection
- 15 Amp Breaker Protection (optional 20A)
- 6 Industrial Grade Receptacles
- Rack mount brackets (1 pair)
- LED & Digital display with various power parameters



Noise Isolation between sensitive electronic loads such as servers and PDU's (Power Distribution Unit)

EP-RPS GENERAL SPECIFICATIONS

MAX SURGE CURRENT

12.5 kA

SAFETY RATINGS

Fire Rating 94V-0

SAFETY APPROVALS

UL 1449 4th Edition (EP-2000)

CSA C22.2#8:2013 Ed 5 EMI filters (EP-2000)

OPERATING ENVIRONMENT

Approximately -10° C to 65° C

APPLICATION ENVIRONMENT

Medical Equipment, Computers and Servers

CONNECTIONS

NEMA 5-15

MATERIALS

Aluminum Housing, LED Indicator Lamps. Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

LEDs indicate active phase, Eight-outlet electrical panel, Rubber base pads

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Stds., Electrical Notice 516

DIMENSIONS & WEIGHT


Height: 3.75" Width: 17"

Depth: 13" Weight: 12 lbs

Industry standard size for integration with other equipment

EP-RPS Product Ordering Guidelines

MODEL NUMBER

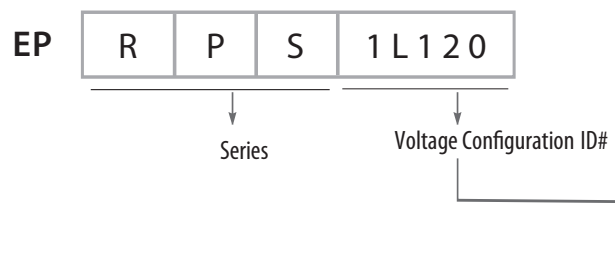

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Leg 120	L-N	400	2 Wire + G	1L120
Single Leg 240	L-N	400	2 Wire + G	1L240

EP-HPS HOME THEATER POWER SUPPLY



The **EP-HPS** is a unique residential power supply, combining several EP product features to provide an all-in-one protection unit with **isolated power banks**. It is conveniently sized for use with standard home entertainment equipment, but can be used in various situations where a protected power supply is beneficial.

THE EP-HPS PROVIDES:

- EP-2000 Surge Protection
- EP-2700 High Frequency Filtering
- EP-2750 Ground Filtering
- 15 Amp Breaker Protection (optional 20A)
- 10 premium quality receptacle Electrical panel for Power Access Industry standard-sized case
- Up to 3 isolated power banks for noise isolation
- LED & Digital display with various power parameters



Noise Isolation between A/V equipment, gaming consoles, home theatre equipment...etc.

EP-HPS GENERAL SPECIFICATIONS

MAX SURGE CURRENT

12.5 kA

SAFETY RATINGS

Fire Rating 94V-0

SAFETY APPROVALS

UL 1449 4th Edition (EP-2000)

CSA C22.2#8:2013 Ed 5 EMI filters (EP-2000)

OPERATING ENVIRONMENT

Approximately -10° C to 65° C

APPLICATION ENVIRONMENT

Medical Equipment, Computers and Servers

CONNECTIONS

NEMA 5-15

MATERIALS

Aluminum Housing, LED Indicator Lamps. Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

LEDs indicate active phase, Eight-outlet electrical panel, Rubber base pads

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Stds., Electrical Notice 516

DIMENSIONS & WEIGHT


Height: 3.75" Width: 17"

Depth: 13" Weight: 12 lbs

Industry standard size for integration with other equipment

EP-HPS Product Ordering Guidelines

MODEL NUMBER

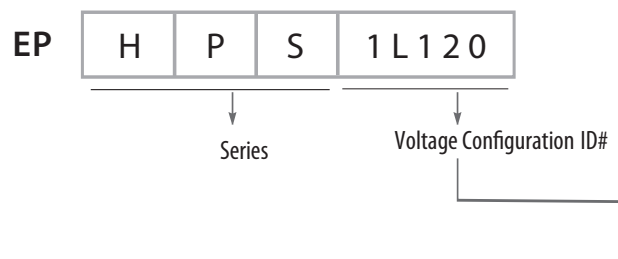

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Leg 120	L-N	400	2 Wire + G	1L120
Single Leg 240	L-N	400	2 Wire + G	1L240

EP-MPS MEDICAL POWER SUPPLY



The EP-MPS is a unique medical power supply, combining several EP product features to provide an all-in-one protection unit with **isolated power banks**. It is conveniently sized for use with standard home entertainment equipment, but can be used in various situations where a protected power supply is beneficial.



THE EP-MPS PROVIDES:

- EP-2000 Surge Protection
- EP-2700 High Frequency Filtering
- EP-2750 Ground Filtering
- 15 Amp Breaker Protection (20A optional)
- 10 Medical Grade Receptacles
- Rack mount brackets (1 pair)
- LED Digital display with various power parameters
- Up to 3 isolated power banks for noise isolation

Noise Isolation between MRI, X-Ray, and other sensitive medical equipment

EP-MPS GENERAL SPECIFICATIONS

MAX SURGE CURRENT

12.5 kA

SAFETY RATINGS

Fire Rating 94V-0

SAFETY APPROVALS

UL 1449 4th Edition (EP-2000)

CSA C22.2#8:2013 Ed 5 EMI filters (EP-2000)

OPERATING ENVIRONMENT

Approximately -10° C to 65° C

APPLICATION ENVIRONMENT

Medical Equipment, Computers and Servers

CONNECTIONS

NEMA 5-15

MATERIALS

Aluminum Housing, LED Indicator Lamps. Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

LEDs indicate active phase, Eight-outlet electrical panel,

Rubber base pads

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Stds., Electrical Notice 516

DIMENSIONS & WEIGHT


Height: 3.75" Width: 17"

Depth: 13" Weight: 12 lbs

Industry standard size for integration with other equipment

EP-MPS Product Ordering Guidelines

MODEL NUMBER

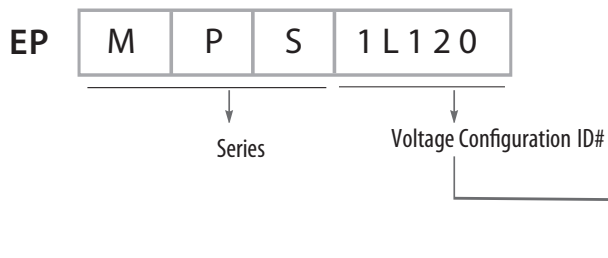

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Leg 120	L-N	400	2 Wire + G	1L120
Single Leg 240	L-N	400	2 Wire + G	1L240

RESIDENTIAL/LIGHT COMMERCIAL

The digital age has not just revolutionized business; it has also brought dramatic increases in home offices and expensive home equipment. A typical home can have tens of thousands of dollars worth of electrical appliances, computers, printers, fax machines and televisions. All of this equipment generates transient energy and frequency noise and ironically all of this equipment is more sensitive to poor power quality.

Now you can protect your expensive televisions, computers and appliances using industrial strength waveform correctors, without the industrial price tag.

Audiophiles spend thousands of dollars on their systems to get pristine audio quality without any noise. For them, the noise on the power line is directly related to the noise coming out of the audio system. A homeowner must need a **“complete home protection with noise removal”** to protect their sensitive electrical loads and to remove noise on the system.



EP-2050 RESIDENTIAL PROTECTION



The **EP-2050** is an industrial electrical surge and noise filtration system adapted for the residential marketplace. The **EP-2050** eliminates detrimental power disturbances that permeate the residential electrical distribution system. The compact unit provides automatic protection for industrial, residential and marine electrical distribution systems.

THE EP-2050:

ABSORBS, DISSIPATES & REMOVES

- Transient voltage surges and spikes
- Frequency Noise Between 3kHz-1MHz
- Ring waves

DOES NOT SHUNT ENERGY TO GROUND.

The facility ground is not relied on for performance or survivability.

EP-2050 GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

Circuit is built to meet Safety Standards:

UL 1449 4th Edition Type 2 & Type 3 SPD

CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous

Key Event Time: Approx. 1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 14 AWG Length: 3'

MATERIALS

Aluminum Housing, LED Indicator Lamps, 14 AWG 600 V rated Wire.

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Amber LED indicates active phase

DIMENSIONS & WEIGHT

100-127 V Units: Diameter: 3" Depth: 2.5" Weight: 1.5 lbs.


Compact for easy installation.

200-250 V Units: Diameter: 4.34" Depth: 3.35" Weight: 3 lbs.

Compact for easy installation.

EP-2050 PRODUCT ORDERING GUIDELINES

MODEL NUMBER

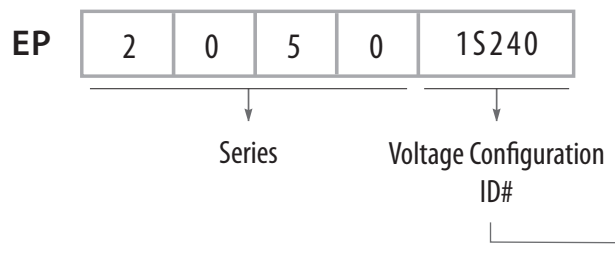

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Phase 100/200	L-N	400	3 Wire + G	1S200
Single Phase 120/240	L-N	400	3 Wire + G	1S240

EP-2050EE HIGH-END RESIDENTIAL PROTECTION



The **EP-2050EE**, a complete Home Protection, is an industrial electrical surge and noise filtration system adapted for the residential marketplace. The **EP-2050EE**, SPD+Noise filter, widely accepted by audiophile market, designed to protect expensive and sensitive electrical loads in the residential electrical distribution system up to 400A load panels.

THE EP-2050EE:

ABSORBS, DISSIPATES & REMOVES

- Transient voltage surges and spikes
- Frequency Noise Between 3kHz-1MHz
- Ring and combination waves

DOES NOT SHUNT ENERGY TO GROUND. The case ground is used to burn off the noise in the system. Uses self healing Thermal MOV's along with patented tank circuit to dissipate the the residual ringing noise from the MOV circuitry.

EP-2050EE GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

UL 1449 4th Edition Type 2 & Type 3 SPD

CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous

Key Event Time: Approx. 1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 14 AWG Length: 3'

MATERIALS

Aluminum Housing, LED Indicator Lamps, 14 AWG 600 V rated Wire.

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES


Amber LED indicates active phase

DIMENSIONS & WEIGHT

Diameter: 4.34" Depth: 3.35" Weight: 3 lbs. Compact for easy installation.

EP-2050EE PRODUCT ORDERING GUIDELINES

MODEL NUMBER

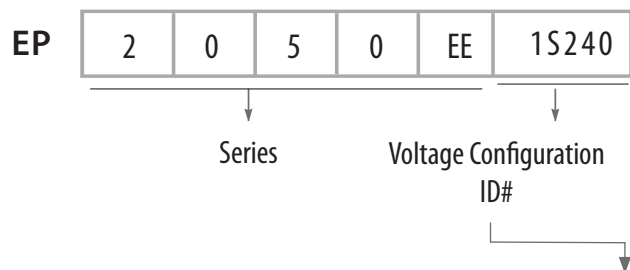

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Phase 100/200	L-N	400	3 Wire + G	1S200
Single Phase 120/240	L-N	400	3 Wire + G	1S240

EP-HPF RESIDENTIAL PROTECTION



THE EP-HPF:

- An industrial grade **surge protector** and **noise filter** for residential market
- Eliminates detrimental **power disturbances** that permeate the residential electrical distribution system
- Designed to protect the **sensitive residential appliances** such as high-end audio/video systems, HVAC and other computer loads
- Widely accepted by **Audiophiles** worldwide
- **Complete Home Protection**
- Available in **12.5kA, 18kA and 25kA** max surge current
- **Quick connection** to any manufacturer's breaker

ABSORBS, DISSIPATES & REMOVES

- Transient voltage surges and spikes
- Frequency Noise Between 3kHz-1MHz
- Ring waves
- Ground loops (When equipped with EP-2750)

EP-HPF GENERAL SPECIFICATIONS

CIRCUIT DESCRIPTION	Internal Circuit Breaker	Spectrum Multiplier	Voltage Limit Clamp (TMOV)	Low-Pass Filter	Dissipative Absorber	(Parallel Operated)
----------------------------	--------------------------	---------------------	----------------------------	-----------------	----------------------	---------------------

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5kA, 18kA and 25kA mode

MCOV

20% above rated voltage

SAFETY APPROVALS

UL 1449 4th Edition TVSS Testing Type 2 SPD

CSA C22.2#8:2013 Ed 5 EMI filters

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous; Key Event Time: Approx. 1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 14 AWG Length: 2'

MATERIALS

Plastic Housing, LED Indicator Lamps, 14 AWG 600V rated Wire.

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Green LED indicates active phase


DIMENSIONS & WEIGHT

Length: 4.85", Width: 3.41", Depth: 1.75", Weight: 1 lb.

Compact for easy installations

EP-HPF Product Ordering Guidelines

MODEL NUMBER

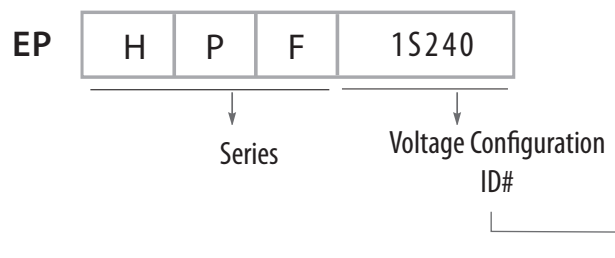

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	VPR	SYSTEM CONFIGURATION	VOLTAGE ID#
Single Phase 100/200	L-N L-G	400	3 Wire + G	1S200
Single Phase 120/240	L-N L-G	400	3 Wire + G	1S240
Single Leg 240	L-N L-G	400	2 Wire + G	1L240

EP DIGIPLUG PORTABLE PLUG-IN PROTECTION



The **EP DigiPlug** uses the same circuit as the industry's most advanced power performance solution available: the EP-2000. The **EP DigiPlug** provides the innovative, patented circuit of the EP-2000 in a portable device to increase the efficiency of smaller electrical equipment. The **EP DigiPlug** protects the technology that drives your process, from lap tops to refrigerators - and everything in between.

THE EP DIGIPLUG:

ABSORBS, DISSIPATES & REMOVES

- Transient voltage surges and spikes
- High frequency noise
- Ring waves

DOES NOT SHUNT ENERGY TO GROUND.

The facility ground is not relied on for performance or survivability.

EP DIGIPLUG GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

Circuit is built to meet Safety Standards: UL 1449 4th Edition ; CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous Key Event Time: Approx. 1 Nanosecond

CONNECTION

Plug in

MATERIALS

Black ABS 94V-0, LED Indicator Lamps

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Red LED indicates active phase

RECEPTABLE RATED

15 Amps


DIMENSIONS & WEIGHT

Dimensions: 4 x 2.25 x 2.75" Weight: 8 oz. Compact for easy installation.

PRODUCT PERFORMANCE

The EP DIGIPLUG absorbs, dissipates and removes transient voltage surges and spikes, high frequency noise and ring waves.

- Noise Attenuation starting at 2.5 kHz
- Max Attenuation of greater than -35 dB from 150 - 500 kHz

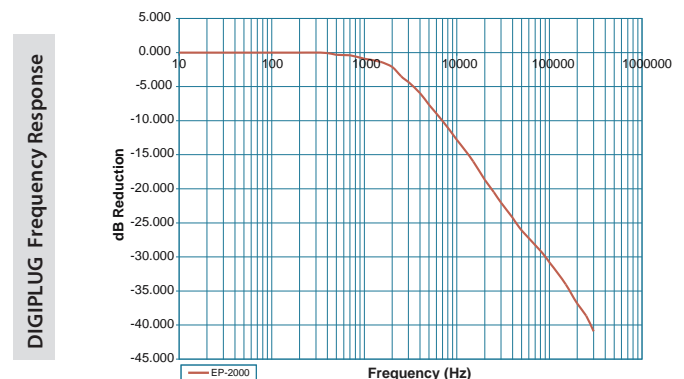

Note:

Comparison charts are unavailable as Legacy TVSS or SPD's do not provide this functionality.

EP DIGIPLUG STATIONARY PLUG-IN PROTECTION

The **EP DigiPlug Stationary** uses the same circuit as the industry's most advanced power performance solution available: the **EP-2000**. The **EP DigiPlug Stationary** provides the innovative, patented circuit of the **EP-2000** in a convenient flush mounted socket to increase the lifespan and performance of high end home electronics. The **EP DigiPlug Stationary** will efficiently filter all power pollution threatening your equipment.

THE EP DIGIPLUG:

ABSORBS, DISSIPATES & REMOVES

- Transient voltage surges and spikes
- High frequency noise
- Ring waves

DOES NOT SHUNT ENERGY TO GROUND.

The facility ground is not relied on for performance or survivability.



EP DIGIPLUG GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

Circuit is built to meet Safety Standards: UL 1449 4th Edition; CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous Key Event Time: Approx. 1 Nanosecond

CONNECTION

Plug in

MATERIALS

Black ABS 94V-0, LED Indicator Lamps

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Red LED indicates active phase

RECEPTABLE RATED


15 Amps

DIMENSIONS & WEIGHT

Dimensions: 4" X 1.4" X 1.25" Weight: 8 oz. Compact for easy installation.

The EP DIGIPLUG absorbs, dissipates and removes transient voltage surges and spikes, high frequency noise and ring waves.


- Noise Attenuation starting at 2.5 kHz
- Max Attenuation of greater than -35 dB from 150 - 500 kHz

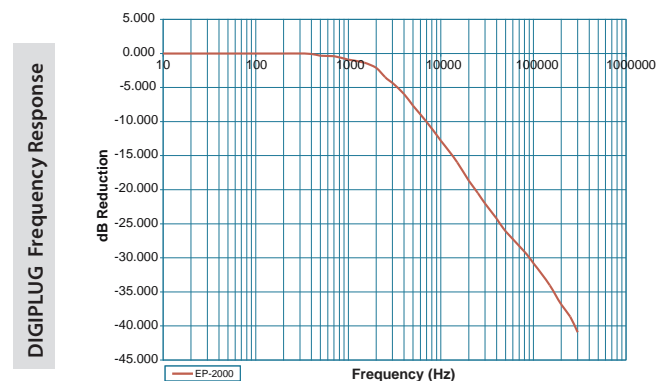

Note:

Comparison charts are unavailable as Legacy TVSS or SPD's do not provide this functionality.

EP-OEM FILTERS: EVERY OTHER ELECTRICAL LOADS

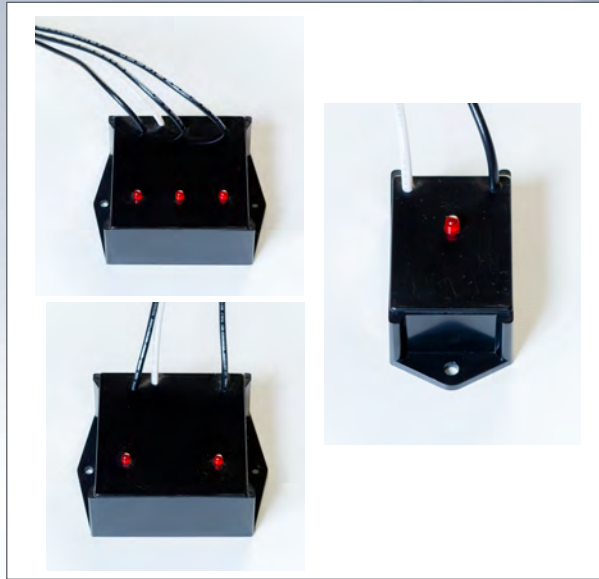

The EP-OEM is the industry's most advanced power quality solution available. The patented circuit of the EP-OEM can integrate into any electrical load's input power supply, uses innovative technology to increase the efficiency of an electrical distribution system, protecting the connected equipment that drives your process, from home automation to industrial robotics - and everything in between.

Typical Applications:

- Control systems, PLCs
- VFD's, Inverters, UPS, PDU's
- Lighting Drivers (LEDs, fluorescent, sodium vapor, mercury etc)
- Pretty much any load that needs protection and performance

EP-OEM will have all the features of regular EP-2000

EP-OEM GENERAL SPECIFICATIONS

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

Circuit board is designed to meet:

UL 1449 4th Edition Type 2 SPD

CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous Key Event Time: Approx.

1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 14 AWG Length: 6 inch

MATERIALS

Plastic Housing, LED Indicator Lamps, 14 AWG 600 V rated Wire.

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Amber LED indicates active phase

EP-OEM PRODUCT ORDERING GUIDELINES				
MODEL NUMBER				
EP-OEM		3Y208		
Series		Voltage Configuration		
		ID#		
VOLTAGE CONFIGURATIONS				
SYSTEM VOLTAGE	PROTECT MODE	SYSTEM CONFIG	VOLTAGE ID#	OEM SIZE
Single Leg 120	L-N	2 Wire	1L120	1.5" x 2.0"
Single Leg 240	L-N	2 Wire	1L240	1.5" x 2.0"
Single Leg 277	L-N	2 Wire	1L277	1.5" x 2.0"
Single Leg 480	L-N	2 Wire	1L480	2.0" x 2.0"
Single Phase 120/240	L-N / L-L	3 Wire	1S240	3.0" x 3.0"
3 Phase 120/208	L-N / L-L	4 Wire	3Y208	3" x 3" or EP-HPF
3 Phase 277/480	L-N / L-L	4 Wire	3Y480	3" x 3" or EP-HPF
3 Phase 240	L-N / L-L	3 Wire	3D240	3" x 3" or EP-HPF
3 Phase 480	L-N / L-L	3 Wire	3D480	3" x 3" or EP-HPF
DC	+ to -	2 Wire	Check with us	

EP-OEM-L LIGHTING FILTER (OEM)



The EP-OEM-L is the industry's most advanced power quality solution available for lighting projects. Its OEM style filter that can be integrated into any lighting driver. Equipped with **Common Mode, Differential Mode and patented EP2000 filter**, it increases the longevity of your lighting solutions, decreasing maintenance and helping to increase return on investment

Typical Applications:

- Street lights, high bay, stadium lighting, etc
- LEDs, fluorescent, sodium vapor, mercury etc

Absorbs and dissipates electrical transients and noise
EP-MINI is TMOV protection + 3 different filter topologies
Can be integrated to any manufacturers lighting driver

EP-OEM-L GENERAL SPECIFICATIONS

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

Circuit board is designed to meet:

UL 1449 4th Edition Type 2 SPD

CSA std. c22.2 No. 8-2013 Ed 5

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous Key Event Time: Approx.

1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 14 AWG Length: 6 inch

MATERIALS

Plastic Housing, LED Indicator Lamps, 14 AWG 600 V rated Wire.

Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

KEY PARAMETERS

CONNECTION METHOD

Series to the circuit. Input to the line, output to the driver

INPUT VOLTAGE RANGE

0v-277v

INPUT CURRENT

5A (MAX)

MAX POWER

600W @ 120Vac

1200w @ 277Vac

OPERATING FREQUENCY

45-65 Hz

DIMENSIONS & WEIGHT


2 1/2 x 1 1/2 x 1 1/4 inch , 4 Oz

MOUNTING METHOD


Inside the fixture, use mounting tabs

EP-OEM-L Product Ordering Code: EP-OEM-L


SAMPLE INSTALLATION: COMPLETE COVERAGE

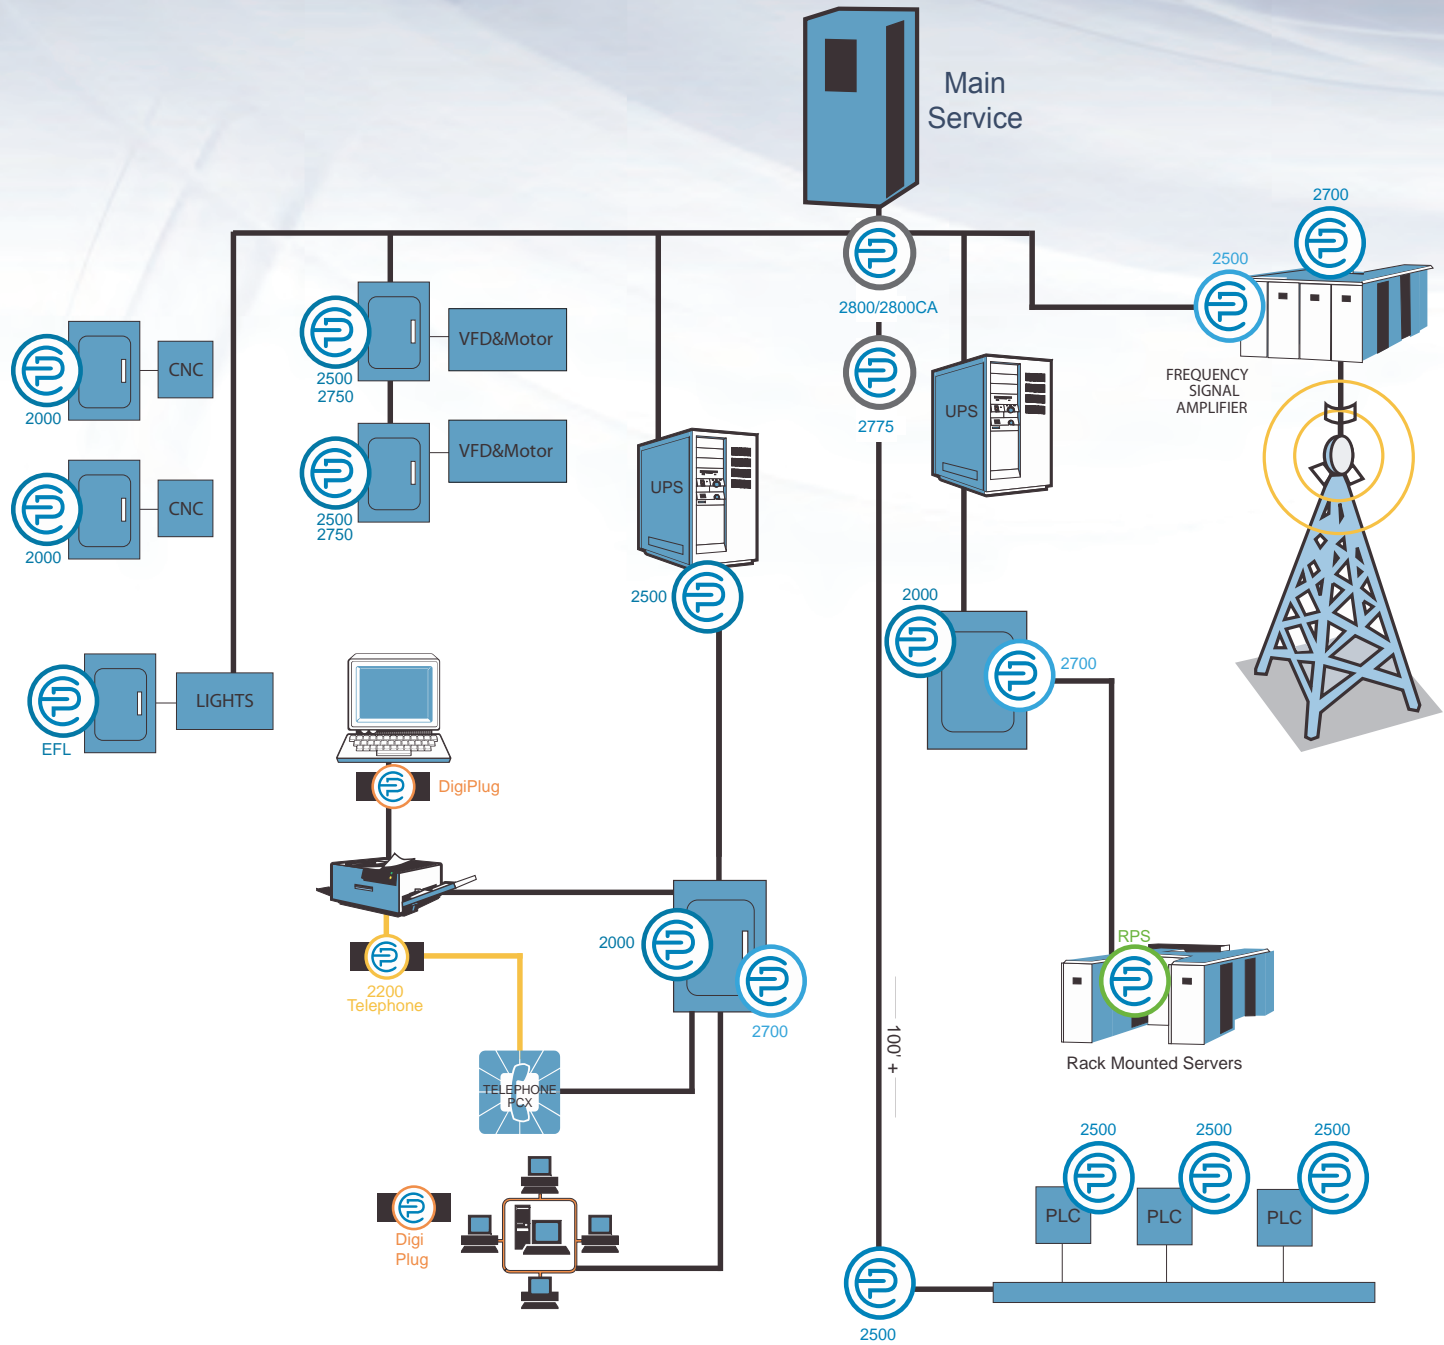


Medical Installation

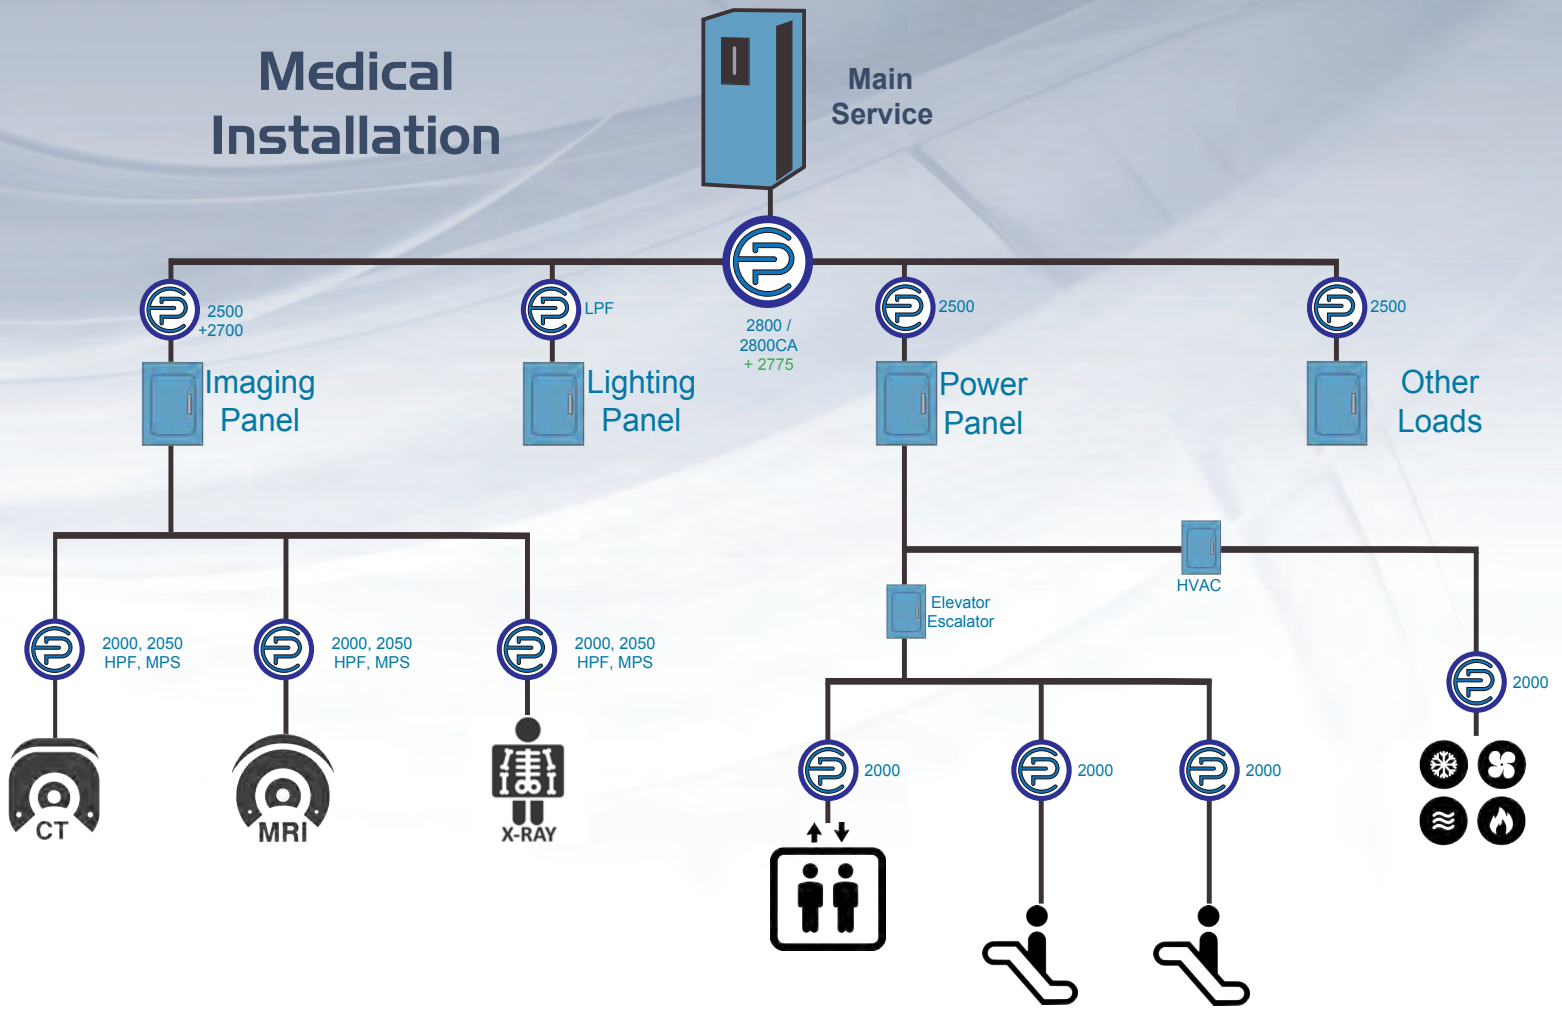


Lighting Protection

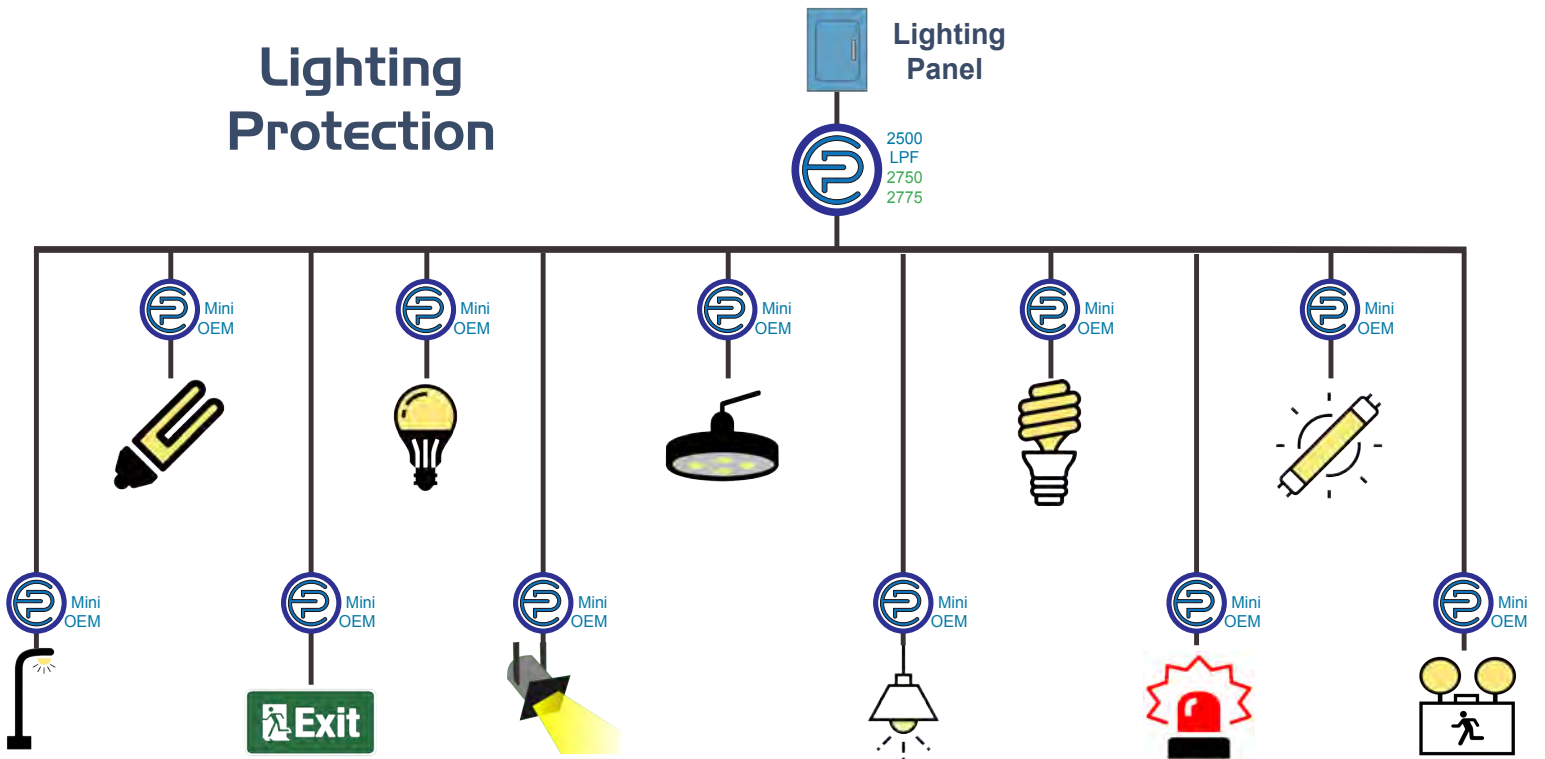

General Residential Installation

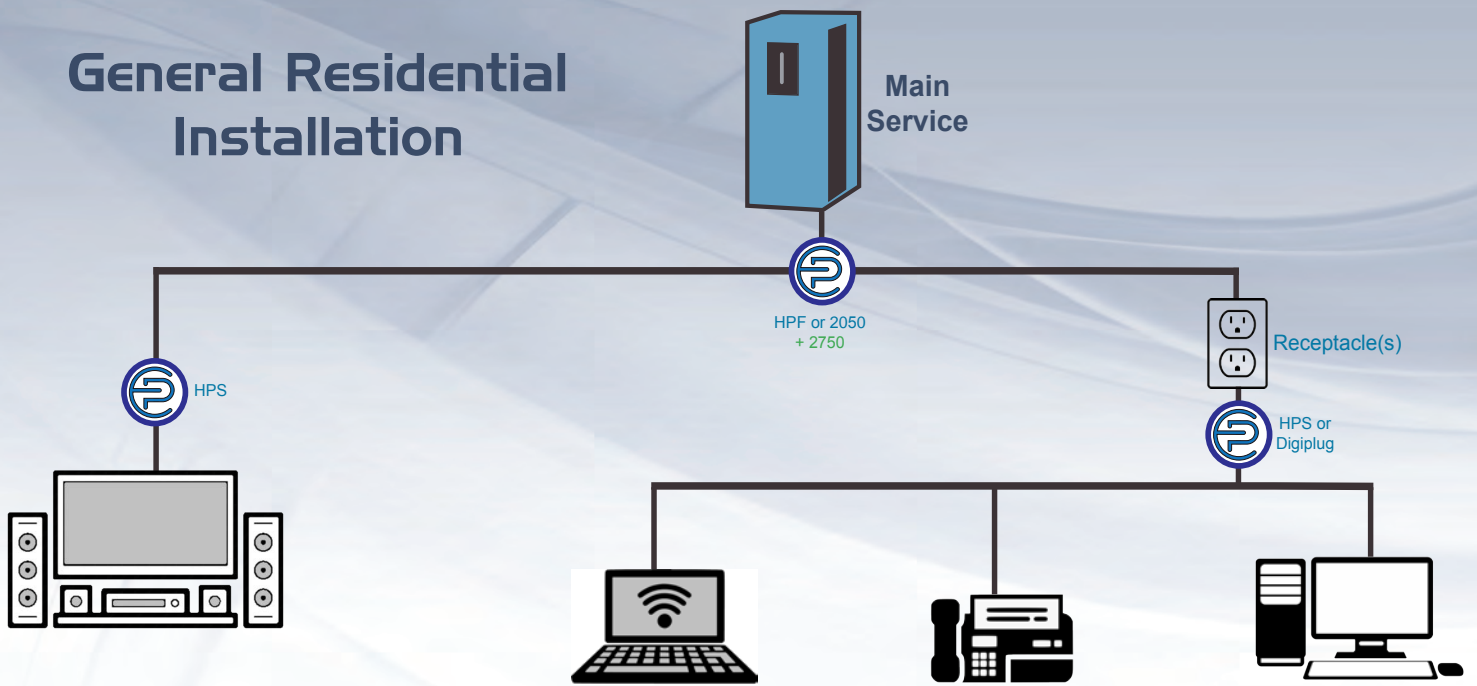

Residential with Dedicated Theater Panel

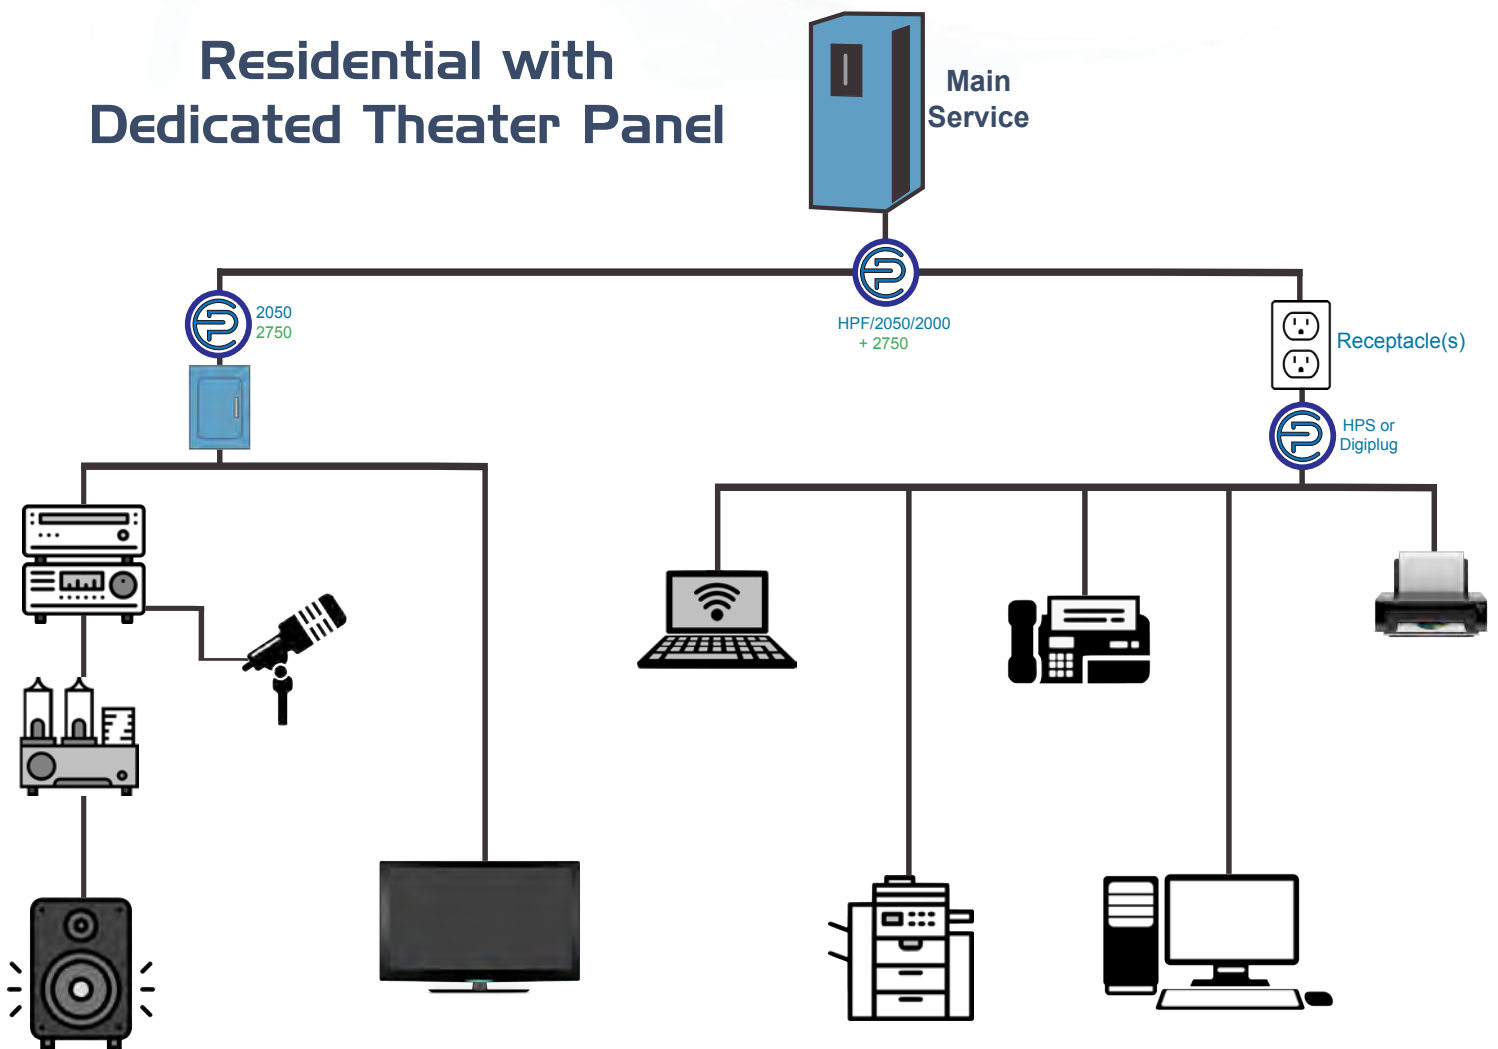

Notes



Environmental Potentials

4220W 2100S, Suite N&O
Salt Lake City, UT 84120

+1.844.500.7436
info@ep2000.com
www.ep2000.com